

Reinforcing Fibreglass Mesh

For DuROCK EIFS

PRODUCT DESCRIPTION

Mesh for DuROCK Exterior Insulation Finish Systems is made of alkali-resistant fibreglass. All mesh is made by a DuROCK-approved manufacturer, with DuROCK's logo plainly visible on the 4.5 and 6.0 ounce reinforcing mesh products.

WEIGHTS AND ROLL SIZES

Self-Adhering Mesh Tape for sheathing board joints

- nominal 65 g/m² (1.9 oz/yd²), 76 mm x 45.7 m (3" x 150')

Starter Mesh for backwrapping

- nominal 145 g/m² (4.3 oz/yd²), 241 mm x 45.7 m (9½" x 150')

4.5 oz Reinforcing Mesh

- nominal 145 g/m² (4.3 oz/yd²), 965 mm x 45.7 m (38" x 150')

6 oz Reinforcing Mesh

- nominal 200 g/m² (5.9 oz/yd²), 965 mm x 45.7 m (38" x 150')

11 oz Reinforcing Mesh

- nominal 370 g/m² (11.0 oz/yd²), 965 mm x 22.9 m (38" x 75')

15 oz Reinforcing Mesh


- nominal 522 g/m² (15.4 oz/yd²), 965 mm x 22.9 m (38" x 75')

APPLICATION

Refer to the applicable EIF System specifications and details for installation information.

TECHNICAL DATA

Technical data is available upon request.

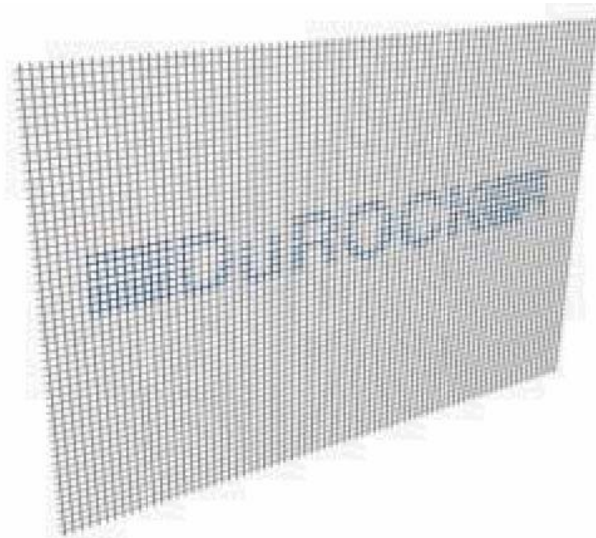

Refer to www.DuROCK.com for the most up-to-date version of this document.